


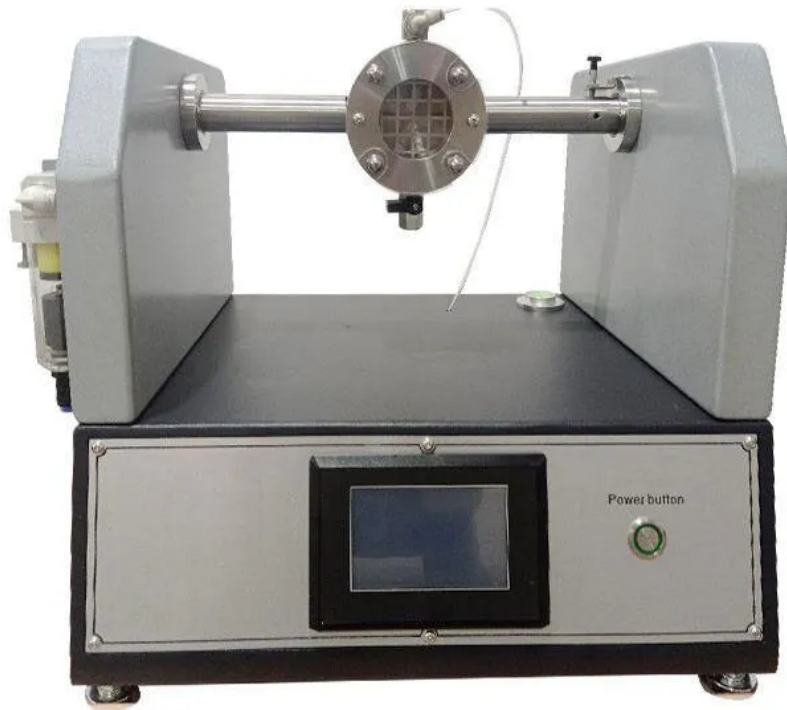

PROTECTIVE CLOTHING BLOOD PENETRATION RESISTANCE TESTER

Protective Clothing Blood Penetration Resistance Tester ToronPC™ BPRT evaluates how well protective clothing materials resist penetration by synthetic blood.

APPLICATIONS

Standards

1. ASTM F903: Specifies the test method to measure the resistance of protective clothing materials to penetration by liquids (chemicals) under conditions of continuous liquid contact.
2. ISO 16603: Determines the resistance of protective clothing materials to penetration by blood and body fluids using a synthetic blood simulant under specified conditions of pressure.
3. IS 16545: An Indian Standard derived from ISO 16603 that establishes the procedure for evaluating the resistance of PPE materials to synthetic blood penetration.
4. ASTM F1670: Evaluates the resistance of materials used in protective clothing to penetration by synthetic blood under constant liquid contact, often used as a precursor to viral testing.
5. ASTM F1671/F1671M: Measures the resistance of materials to penetration by bloodborne pathogens using the Phi-X174 bacteriophage as a test system under continuous liquid contact.

6. ISO 16604: Determines the resistance of protective clothing materials to penetration by bloodborne pathogens using a viral challenge (Phi-X174 bacteriophage) and a specific pressurized test apparatus.
7. IS 16546: An Indian Standard equivalent to ISO 16604 that outlines the test method for determining the resistance of protective clothing materials to penetration by bloodborne pathogens.

Protective Clothing Blood Penetration Resistance Tester

Protective Clothing Blood Penetration Resistance Tester

FEATURES

The Protective Clothing Blood Penetration Resistance Tester ToronPC™ BPRT offers advanced functionality and precise testing capabilities:

1. Available with one or four working positions, allowing simultaneous testing of up to four specimens.
2. Features single-chip microcomputer control for automatic timing, operation, and alerts upon test completion.
3. Equipped with a mechanical pressure meter for easy verification.
4. Includes a touchscreen interface (HMI) for real-time monitoring of pressurized pressure.
5. Each working position has an independent pressure monitoring display.

6. Utilizes a programmable throttle valve to ensure the pressurization rate does not exceed 3.5 kPa/s.
7. Specimen installation is simplified with a 13.6 N·m ratchet wrench, offering precise and controllable torque.

TECHNICAL SPECIFICATIONS

Model	ToronPC™ BPRT-1	ToronPC™ BPRT1-4
Working position	1	4
Specimen dimension	75mm x 75mm Compressed cross-section diameter: Φ 57mm	
Retardation mesh	304 Stainless Steel Open space ≥ 50% Curve ≤ 5mm at 14 kPa	
Air supply	Compression air	
Fixture torque	13.6 N·m	
Air supply	≥ 0.4 kg/cm ²	
Standard accessory	Digital Torque Wrench, 1 set	



Torontech Inc.

251 Consumers Road, Suite 1200
Toronto, Ontario, M2J 4R3, Canada 

Phone: +1 416 368 2721 | Fax: +1 416 981 7652
Email: info@torontech.com

Torontech, LLC

601 Brickell Key Drive, Suite 700
Miami, FL 33131, USA 

Toll-Free: 1-866-383-7919
Email: sales@torontech.com

Torontech ME FZE

Meydan Grandstand, 6th Floor,
Meydan Road, Nad Al Sheba,
Dubai-261440, UAE 

Phone: +971 488 19252
Email: me@torontech.com

